


Part No.

QTHA-HNS0

1/4"-28 UNF X male Quick-test, no check-valve, S.S.

Connect a Quick-test hose directly to a DP transmitter or gauge valve using the bleeder port when the transmitter is not mounted on a 3 valve manifold or gauge valve or when the manifold is not easily accessible.

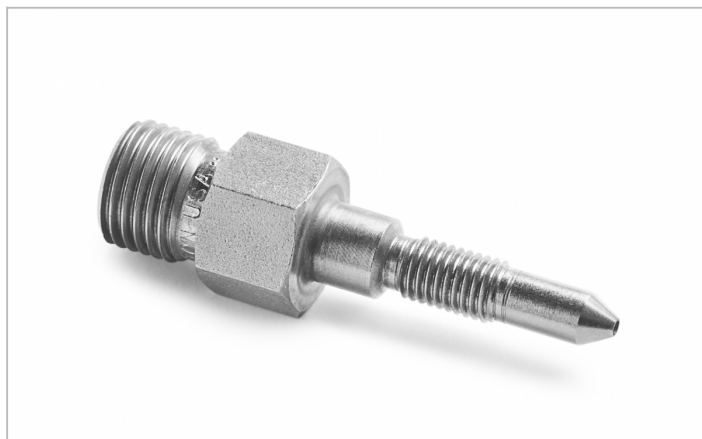

QTHA-HNS0

Specs/Attributes

Compatible with	Honeywell Smartline ST700 Pressure Transmitter, Honeywell Smartline ST800 Pressure Transmitter
Country of origin	USA
Materials	Stainless Steel
Max Operating Temperature	140 °F / 60 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Media Compatibility	Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N
Wrench Size	9/16 In 15 mm
Connector End 1	1/4-28 Male DP Transmitter/Gauge valve
Connector End 2	Male Quick-test
Weight	0.94 oz / 27 grams
Dimensions	H: 2.02 in (5.13 cm) x W: 0.56 in (1.42 cm) x D: 0.56 in (1.42 cm)